

6-FM-7



The Narada Telecom range of VRLA batteries are well suited to provide battery backup to any application long duration or outside plant application.

All Narada Telecom series batteries use optimized plate technology and a patented post design offering exceptional service life.



Technical Features:

- ◆ Flame Retardant ABS Cover and Container, UL94 V-0, LOI>28%
- ◆ Patented copper alloy terminal design
- ◆ Epoxy TPS design for high reliability post seal
- ◆ 6 months of storage at 77°F (25°C) with a capacity > 80%
- ◆ Initial capacity at 100%
- ◆ Low pressure one-way flame arresting valve(s) UL1989
- ◆ Absorbent Glass Mat (AGM) Sealed Technology, Recombination efficiency of 99.9%

Compliance and Safety:

- ◆ **ISO 9001:2000 and ISO 14001:2004 certified production facilities**
- ◆ UL Recognized Component 924, for use in or with listed UL1778, UL1989 and UL924 systems
- ◆ IEC60896-21/22
- ◆ BS6290 part 4 / Eurobatt guide
- ◆ **TL9001 / ISO9001(TUV) Quality System**
- ◆ Battery installation compliant with: EN 50272-2
- ◆ All batteries meet or exceed IEEE recommended practices

Transportation:

- ◆ Classified as Nonspillable UN 2800 and meet the Nonspillable criteria listed in DOT-CFR Title 49, 171-189 (d) (3) (i) and (ii) and exempt from CFR 49, Subchapter C requirements
- ◆ Meets transportation conditions of IMDG exemption 238, IATA/ICAO Special Provision A67 (Not Restricted)

Ah @ 8hr 1.75 vpc / 77°F (25°C)	7 Ah
Ah @ 20hr 1.75 vpc / 77°F (25°C)	7.2 Ah

Nominal Voltage	12V
Float Charge Voltage @25°C (2.23 – 2.27vpc)	13.4 – 13.6
Max. Charge Current (A) (5 hour rate @ 1.75vpc)	2.1 Amps

Electrolyte Absorbed H ₂ SO ₄	1.300
--	-------

Short Circuit Current (A)	100 Amps
Internal Resistance (mΩ)	20.0

Terminal Type	Torque
F2 (F1 Optional)	N/A

Dimension	in	mm
Length	5.94	151
Length Base	5.91	150
Width	2.65	65
Overall Height	3.94	100

	Lbs.	Kg
Weight	4.63	2.1

CLEI	Pending	CPR	Pending
------	---------	-----	---------


Operating Parameters

Float Charging Voltage	13.5V / 2.25vpc @ 77°F (25°C)
Equalize /Cycle	14.0V – 14.3V 2.33Vpc to 2.38Vpc @ 77°F (25°C)
See Operations and Maintenance Manual for specific guidelines and recharge times	

Charging Temperature Compensation	-2 mV/cell/°F > 77°F (-3.6 mV/cell /°C > 25°C)
	+2 mV/cell/°F < 77°F (+3.6 mV/cell/°C < 25°C)

Maximum AC Ripple (Charger)	0.5% RMS, 1.5% peak-to-peak for float charge voltage for best results
-----------------------------	---

Operating Temperature Range	
Nominal	+74°F (24°C) to 80°F (27°C)
Charge	-20°F (-28°C) to +122°F (50°C)
Discharge	-40°F (-40°C) to +140°F (60°C)
Storage Temperature Range	-4°F (-20°C) to +104°F (40°C)

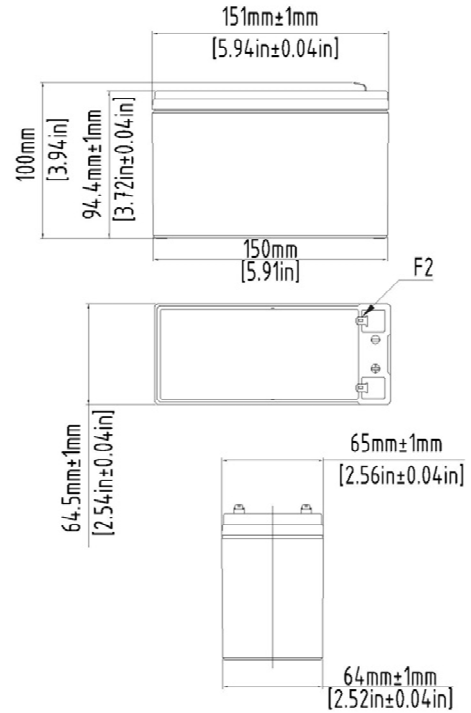

Constant Current Discharge (Amps) @ 77°F/25°C

End vpc	5m	15m	30m	45m	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.67	24.7	12.7	8.2	6.2	4.4	2.5	1.94	1.55	1.33	1.09	0.90	0.71	0.63	0.37	0.33
1.70	22.5	11.7	7.7	6.1	4.4	2.5	1.92	1.54	1.32	1.08	0.89	0.71	0.62	0.37	0.33
1.75	20.6	11.0	7.4	6.1	4.3	2.5	1.89	1.51	1.30	1.06	0.88	0.69	0.62	0.36	0.33
1.80	20.2	10.8	7.3	5.8	4.2	2.4	1.85	1.48	1.27	1.04	0.87	0.68	0.62	0.35	0.33
1.83	20.1	10.7	7.2	5.6	4.2	2.4	1.84	1.47	1.26	1.03	0.86	0.68	0.59	0.35	0.32
1.85	19.9	10.6	7.2	5.4	4.2	2.4	1.82	1.45	1.25	1.02	0.84	0.67	0.58	0.35	0.32
1.86	19.0	10.3	7.1	5.3	4.1	2.3	1.80	1.41	1.23	1.00	0.82	0.64	0.56	0.33	0.32

Constant Power Discharge (Watt/Cell) @ 77°F/25°C

End vpc	5m	15m	30m	45m	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.67	48.2	24.8	15.9	11.6	8.7	5.0	3.79	3.03	2.60	2.12	1.71	1.39	1.22	0.72	0.64
1.70	43.8	22.8	15.1	11.6	8.6	4.9	3.75	2.99	2.57	2.10	1.69	1.37	1.21	0.71	0.63
1.75	40.2	21.5	14.5	11.5	8.4	4.8	3.68	2.94	2.53	2.06	1.68	1.35	1.21	0.70	0.63
1.80	39.5	21.1	14.2	11.2	8.3	4.7	3.62	2.89	2.48	2.02	1.67	1.33	1.21	0.69	0.63
1.83	39.0	20.9	14.1	10.9	8.2	4.6	3.76	2.85	2.44	2.00	1.65	1.31	1.17	0.68	0.63
1.85	38.7	20.7	14.0	10.4	8.1	4.6	3.55	2.83	2.43	1.98	1.60	1.30	1.16	0.68	0.62
1.86	37.0	20.0	13.6	10.2	7.9	4.3	3.60	2.80	2.41	1.96	1.57	1.28	1.15	0.66	0.62

China: **Narada**
 NARADA POWER SOURCE CO.,LTD.
 No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China
 Tel:+86-571-28827013 Fax:+86-571-85126942
 Website:www.en.naradabattery.com E-mail: intl@narada.biz

MPI Narada MPI-Narada
 44 Oak St
 Newton, MA 02464
 Tel: 800-982-4339
 sales@mpinarada.com www.mpinarada.com

