

12HTB100F



TECHNICAL FEATURES:

- Flame Retardant ABS Cover and Container, UL94 V-0, LOI>28%
- Patented copper alloy terminal design
- Epoxy TPS design for high reliability post seal
- 24 months of storage at 68° F (20° C)
- Initial capacity at 100%
- Low pressure one-way flame arresting valve(s) UL1989
- Absorbent Glass Mat (AGM) Sealed Technology, Recombination efficiency of 99.9%

COMPLIANCE AND SAFETY:

- ISO 9001:2000 and ISO 14001:2004 certified facilities
- UL Recognized Component 924, for use in or with listed UL1778, UL1989 and UL924 systems
- IEC60896-21/22 / BS6290 part 4
- Certified to NEBS Version 8, Level 3
- Telcordia GR-1089-CORE, Issue 6
- Telcordia GR-63-CORE, Issue 4
- Manufactured under system ISO9001(TUV)
- Battery installation compliant with: EN 50272-2 or local equivalents
- NEBS Earthquake Risk Seismic Zone 4 Compliant

TRANSPORTATION:

- Classified as Nonspillable UN 2800 and meet the Nonspillable criteria listed in DOT-CFR Title 49, 171-189 (d) (3) (i) and (ii) and exempt from CFR 49, Subchapter C requirements
- Meets transportation conditions of IMDG exemption 238, IATA/ICAO Special Provision A67 (Not Restricted)


The Narada Telecom Pure Lead range of VRLA batteries are well suited to provide battery backup in outdoor application long duration or outside plant application. All Narada Telecom series batteries use CCPP plate technology and a patented post design offering exceptional service life.

Ah @ 8hr 1.75 vpc / 77°F (25°C)	96 Ah	
Ah @ 10hr 1.80 vpc / 77°F (25°C)	101 Ah	
Nominal Voltage		12V
Float Charge Voltage @25°C (2.27vpc)		13.62
Max. Charge Current (A) (5 hour rate @ 1.75vpc)		25 Amps
Electrolyte Absorbed H ₂ SO ₄	1.300	
Short Circuit Current (A)	2318 Amps	
Internal Resistance (mΩ)	5.47	
Terminal Type		Torque
M6-M (Front L Bracket)		78 in-lbs (8 ±1 Nm)
M8-F (Top Insert)		90 in-lbs (10 ±1 Nm)
Dimension	in	mm
Length	15.6	395
Length Base	14.5	368
Width	4.3	108
Overall Height	11.3	287
Weight	Lbs.	Kg
	69	31.2
CLEI	Pending	CPR
		Pending

OPERATING PARAMETERS

Float Charging Voltage	13.62V / 2.25vpc @ 77°F (25°C) 13.44V / 2.24 vpc @ 95°F (35°C)
Equalize /Cycle	14.0V – 14.3V 2.33Vpc to 2.38Vpc @ 95°F (35°C)
See Operations and Maintenance Manual for specific guidelines and recharge times	
Charging Temperature Compensation	-2 mV/cell/°F > 94°F (-3.6 mV/cell /°C > 25°C)
	+2 mV/cell/°F < 94°F (+3.6 mV/cell/°C < 25°C)
Maximum AC Ripple (Charger)	0.5% RMS, 1.5% peak-to-peak for float charge voltage for best results

Operating Temperature Range	
Nominal	+75°F (25°C) to 95°F (35°C)
Charge	-20°F (-28°C) to +122°F (50°C)
Discharge	-40°F (-40°C) to +140°F (60°C)
Storage Temperature Range	-4°F (-20°C) to +104°F (40°C)

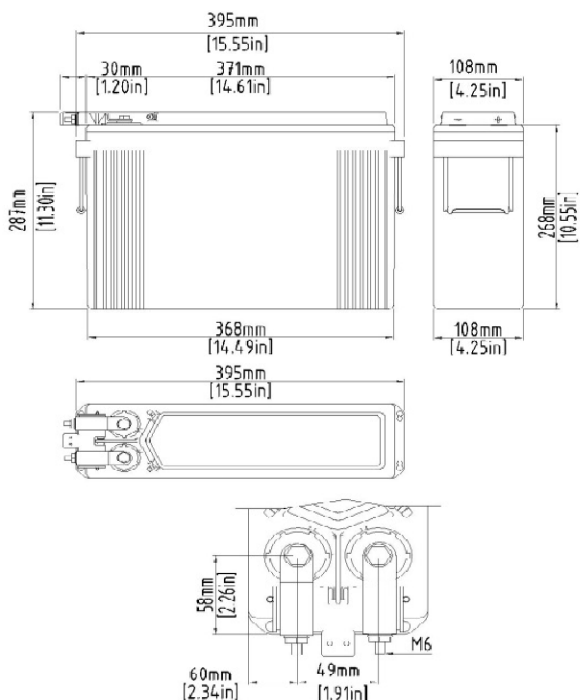

Constant Current Discharge (Amps) @ 77°F/25°C

End vpc	5m	15m	30m	45m	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24 h
1.67	333	186	118												
1.70	325	184	117	86.5	69.4										
1.75	308	179	115	85.3	68.5	39.2	27.8	21.7	17.9	15.3	12.0	10.2	8.66	5.61	4.81
1.80	279	171	111	83.1	66.9	38.4	27.3	21.4	17.7	15.1	11.8	10.1	8.61	5.57	4.80
1.83	260	163	107	80.6	65.1	37.7	26.9	21.1	17.5	15.0	11.7	9.95	8.52	5.56	4.79
1.85	249	157	104	78.7	63.7	37.1	26.6	20.9	17.3	14.8	11.6	9.85	8.42	5.49	4.72
1.86	244	154	102	77.7	63.0	36.8	26.5	20.8	17.2	14.7	11.5	9.80	8.37	5.45	4.69

Constant Power Discharge (Watt/Cell) @ 77°F/25°C

End vpc	5m	15m	30m	45m	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24 h
1.67	590	351	227												
1.70	583	348	225	170	138										
1.75	562	338	221	167	136	79.0	56.5	44.3	36.6	31.2	24.2	20.5	17.5	11.1	9.43
1.80	523	323	214	163	133	77.8	55.9	43.8	36.2	30.9	24.0	20.3	17.3	11.0	9.26
1.83	492	310	207	159	130	76.7	55.3	43.4	35.9	30.7	23.8	20.2	17.1	10.8	9.14
1.85	470	298	202	155	127	75.5	54.4	42.8	35.4	30.2	23.4	19.8	16.8	10.6	8.89
1.86	459	293	199	153	125	74.9	53.9	42.5	35.1	29.9	23.2	19.6	16.6	10.5	8.77