

1C NESP Module and Rack System

633-864V and 950-1296V



The Narada NESP Series

The Narada NESP Series LFP High Capacity Lithium Iron Phosphate batteries are designed for a broad range of Battery Energy Storage Solutions (BESS) providing a wide operating temperature range, while delivering exceptional warranty, safety, and life. Whether used in cabinet, container or building applications, NESP Series batteries will meet any energy storage solution need.


Module & Rack Design

FEATURES

- 0.5C to 2.0C options available
- 633VDC to 1292VDC Charge Voltage Options
- Frequency Regulation
- Peak Shifting
- Curtailment/Demand Response
- Reserve Power
- High LFP Energy Density
- Passive & Active Thermal Ventilation
- Designed for Containerized, Cabinet, and Building Solutions

1C NESP Module and Rack System

633-864V and 950-1296V

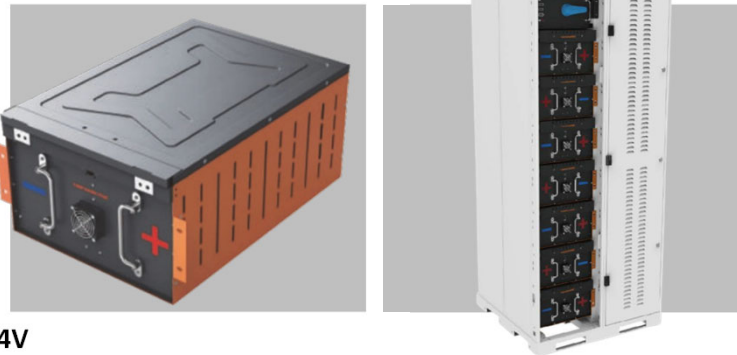

NESP Module & Rack Specification 633 to 864V

Item	Module	11 Module	13 Module	15 Module
1C	51.2NESP200	7512100113	512100133	512100154
Cell Capacity	200Ah	200Ah	200Ah	200Ah
Energy	10.2 kWh	113 kWh	133 kWh	154 kWh
Nominal Volt	51.2 V	563.2 V	665.6 V	768 V
Minimum Volt.	44.8 V	492.8 V	582.4 V	672 V
Maximum Volt.	57.6 V	633.6 V	748.8V	864V
Dimensions	415x600x265mm 16.3x23.6x10.4 in	1000x650x1860 mm 39.4x25.6x73.2 in	1000x650x2130 mm 39.4x25.6x83.9 in	1000x650x2400 mm 39.4x25.6x94.5 in
Weight	89 kg 196 lbs	1317 kg 2903 lbs	1521 kg 3353 lbs	1723 kg 3799 lbs

NESP Module & Rack Specification 950 to 1296V

Item	Module	11 Module	13 Module	15 Module
1C	76.8NESP200	768100169	768100200	768100230
Cell Capacity	200Ah	200Ah	200Ah	200Ah
Energy	15.4 kWh	169 kWh	200 kWh	230 kWh
Nominal Volt	76.8V	844.8V	998.4V	1152V
Minimum Volt.	67.2 V	739.2V	873.6V	1008V
Maximum Volt.	86.4 V	950.4 V.	1123.2V	1296V
Dimensions	4400x884x265mm 15.7x34.8x10.4 in	1000x938x1860 mm 39.4x36.9x73.2 in	1000x938x2130 mm 39.4x36.9x83.9 in	1000x938x2400 39.4x36.9x94.5 in
Weight	134kg 295 lbs	1849 kg 4076 lbs	2156 kg 4753 lbs	2462.5 kg 5430lbs

SAFETY CERTIFICATIONS

UL 9540 | UL 9540A | UL 1973 | UL 1642 | IEC 62619 | IEC 61508 | UL 991 | UL 1998 | UL60730-1 | NFPA 70E | NFPA 70 | ANSI/IEEE C-2 | UL 60950 | NFPA 551 | NFPA 550 | IEC 60812 | IEC 61025 | MIL-STD-1629A | UL1778 | UL1598 | UL8750 | UL1012 | UL1995 | UN 38.3 | IEC 62281

PERFORMANCE & GRID INTERCONNECT CERTIFICATIONS

IEC61427-2 2015 | IEC 62620 | PNNL-22010 | UL 1741 (SA) | IEEE 1547 | ANSI/IEC 60529 | NEMA 250 | UL 50E | IEEE 693-2005

MPINarada , 44 Oak St. Newton, MA 02464, USA | 800-982-4339 | ess@mpinarada.com